


IMPORTANT Read these instructions before installing and using this product.



Failure to follow the instructions and safety precautions in this manual can result in serious injury or death.

Keep these instructions in a safe location for future reference

Flex Grip Pro Double

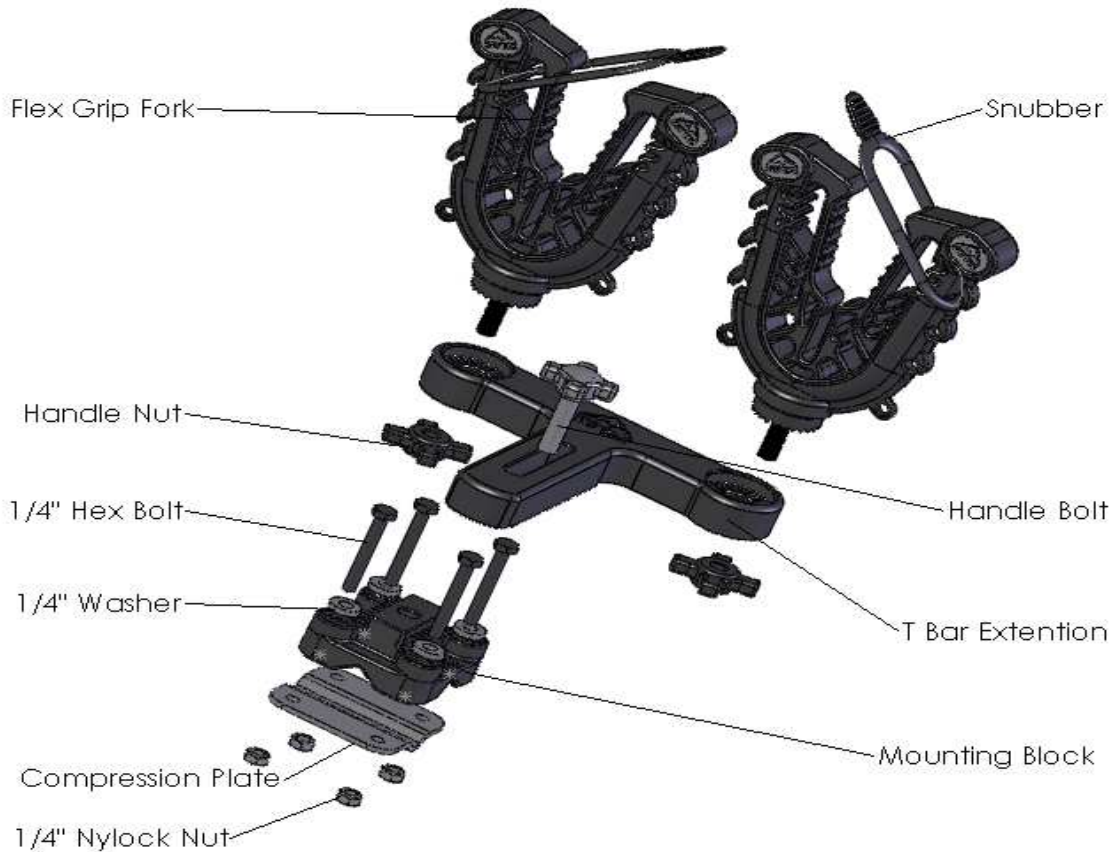

Tools Needed: (2) - 7/16" wrenches



Mounting Instructions:



1. Determine where on the front or rear rack of the ATV you want to mount the racks. Next we recommend placing the Forks on the gun, bow or other item you intend to carry in the rack. This will help you determine how far apart to space the racks on your ATV.

For **Guns** the racks should be usually be spaced about 18" to 22" inches apart and be placed on the gun at the pistol grip area and fore-end area of the stock.

For **bows** the limbs should be placed in the bow limb slot as close to the riser as possible

2. The **Smart Fit** mounting blocks have 2 mounting position options. Choose the option that best fits the size of the ATV rack you are mounting them to.

Standard Position: USE the supplied washers shown in red. In this position, the mounting block will fit round tubes up to 1", square tubes up to 1/2" and composite(plastic racks) up to 1/2" thick.

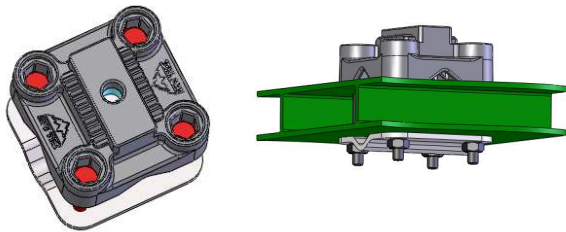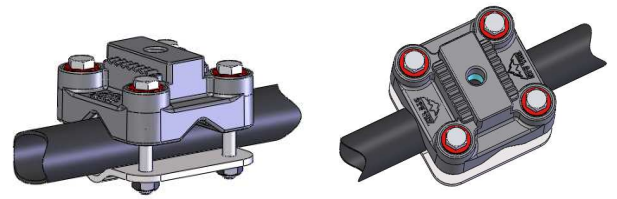

Extended Position: **DO NOT** use the supplied washers! This will allow the hex bolts shown in red below to drop further down into the mounting block. The mounting block will now fit round tubes up to 1 1/2", square tubes up to 1 1/4", and composite (plastic racks) up to 1 1/4" thick.



Place the **Smart Fit** mounting block on the ATV rack in the desired mounting location.

IMPORTANT: Align the width adjustment track on the block so the Extension Bar provides adjustment in the desired direction.

Tighten the nylock nuts, alternate while tightening to ensure even pressure on the compression plate.

3. Attach extension bar to mounting block with handle bolt.

4. Attach Flex Grip Fork to Extension Bar by placing the 3/8" mounting stud through hole on the end of the extension bar. Secure from the bottom side with the provided handle nut.

5. Place the item you want to carry in the forks. For a better fit, the Forks can be rotated 360 degrees and the width can be adjusted a total of 16 inches.

6. Place the snubber into one of the three mounting positions on the Fork that will best hold your item. Pull the snubber over the item to the opposite side and secure it into one of the three mounting positions on that side. Always insure your item is strapped in securely.

